



**Introducing the Anima Pro autoclave,
specifically designed for veterinary practices.**

**Anima Pro is a Class B 22 litre sterilizer, offering
superior performance and fully supported by
Prestige Medical's award-winning customer
service and technical service support.**



**Anima Pro provides Class B vacuum and
Class N non-vacuum cycles in the same unit,
with a host of new features to help simplify
and streamline the day to day sterilization of
veterinary instruments.**

 **Anima Pro**[®]

Easy to use, reliable and cost-effective the Anima Pro's outstanding performance comes from having more than 30 years of high quality autoclave design experience.

COOLTECH

CoolTech, the latest in compact high performance cooling, allows the Anima Pro to achieve even faster cycle times than the previous Anima model.

Flexi Rack

For maximum flexibility, FlexiRack can accommodate up to 20 different tray configurations and can be adapted to accept a wide range of loads. Improved drying performance is provided by the autoclave's HTS (Heat Transfer System), designed to take full advantage of the high performance thermal conductivity properties of aluminium.

 **VSI**

Anima Pro also comes with VSI (Visual System Indicator), a six cycle stage indicator light, giving immediate cycle status and operator peace of mind, together with a selection of water feed and drain options to best meet your needs.

The clear, backlit LCD display with simple user friendly 6 push button control system ensures safe and correct operation.



Specification

Class B Vacuum

Chamber Capacity (litres)	22
Max instrument length (mm)	450
Width (mm)	480
Height (mm)	410
Depth (mm)	610
Max net weight (kg)	43.5
Chamber diameter (mm)	250
Chamber length (mm)	470 max
Max Load Weight kg:	
Solid unwrapped	8
Wrapped	2
Porous	1
Operating Pressure (minimum)	2.05 bar (gauge)
Voltage/Wattage	230V/2200W
Frequency	50Hz – 60Hz



STANDBY MODE
Press standby to go
to READY MODE and
enable door access.



COOLTECH

Features

Unique FlexiRack tray and load management system

Robust integral stainless steel waste water tank and a high performance cooling system for faster cycle times


Multiple water feed and drain options

Clear, backlit LCD display with simple user friendly 6 push button control system

VSI (Visual System Indicator). Six cycle stage indicator light

New easy fit door seal system

Supplied as standard with an integrated data logger and SD memory card

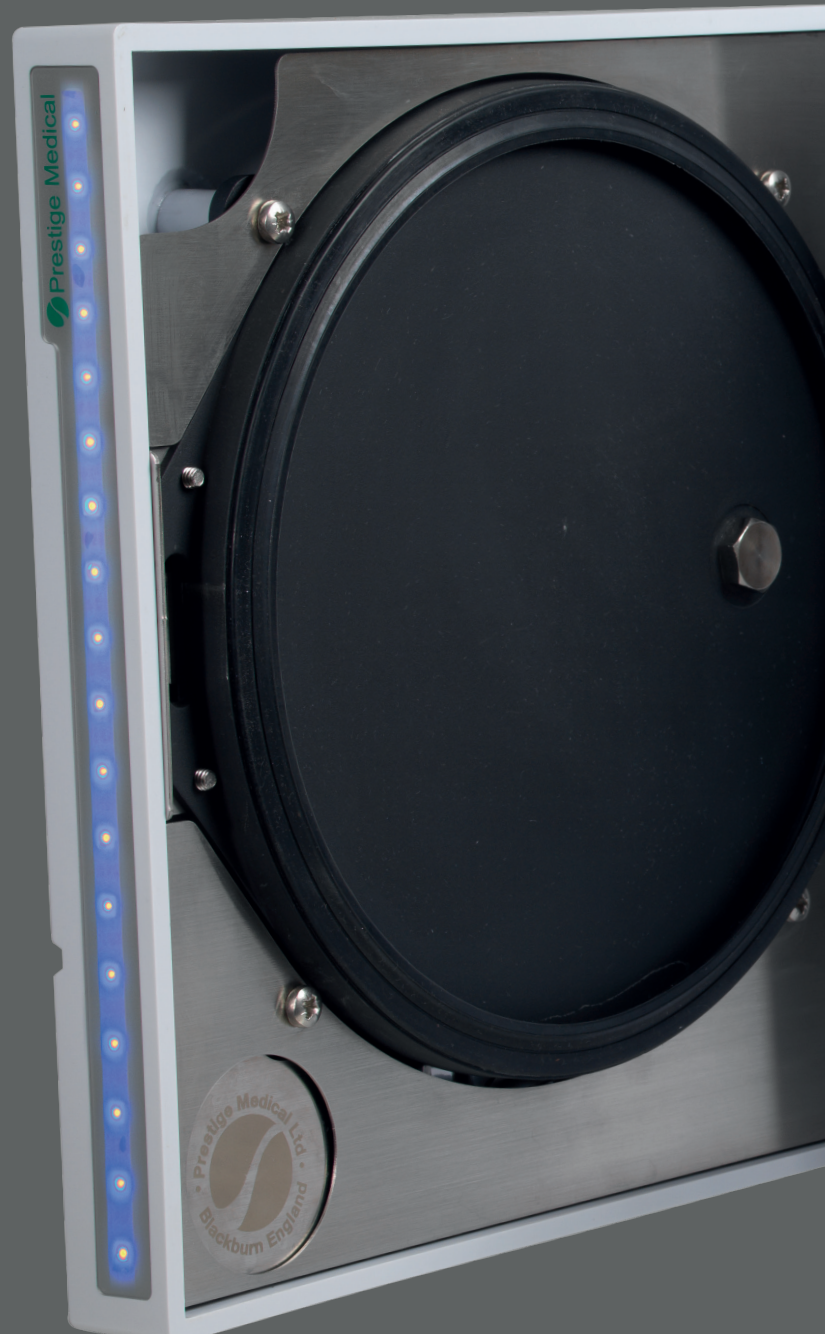

DO NOT USE TAP WATER




 **Anima Pro**

STANDBY MODE
Press standby to go
to READY MODE and
enable door access.



COOLTECH



Cycle	Load	Min Sterilizing Temp °C	Sterilizing Time (Mins)	Cycle Time (Mins) 22ltr	Drying
Standard (Type B)	Porous loads, wrapped, pouched, solid or hollow instruments	134	3.5	47	✓
Standard (Type B)	Porous loads, wrapped, pouched, solid or hollow instruments	121	16	59	✓
Prion cycle	Porous loads, wrapped, pouched, solid or hollow instruments	134	18	62	✓
Test Pack/ Quick B Cycle	Steam penetration test	134	3.5	35	-
Sensitive (Type N)	Unwrapped solid instruments	121	16	29	✓ (optional)
Standard (Type N)	Unwrapped solid instruments	134	3.5	19	✓ (optional)

Note: All cycles were conducted utilising a 2 kg load. The cycle time will change depending on the load type, quantity & weight

Compliant to international standards and guidelines

- 93/42/EEC Medical Device Directive (MDD)
- 97/23/EEC Pressure Equipment Directive (PED)
- 2012/19/EU Waste Electrical and Electronic Equipment (WEEE)
- BS EN 13060: 2014 Small steam sterilizers
- BS EN 61010-1:2010 Safety requirements for electrical equipment for measurement, control, and laboratory use
- BS EN 61010-2-040:2015 Safety requirements for electrical equipment for measurement, control, and laboratory use
- BS EN 61326-1:2013 Electrical equipment for measurement, control and laboratory use. EMC requirements
- HTM 01-05
- ISO 13485 and ISO 9001
- Restriction of Certain Hazardous Substances in Electrical and Electronic Equipment Directive under 2011/65/EU
- EN ISO 14971:2012 Risk management for Medical Devices

CE
0088

FlexiRack® Design Reg No 6003493



UK customers

For more information or advice on decontamination, contact us on **01254 844 103**

Export customers

For more information contact your distributor or Prestige Medical on **+44 1254 844 102**

Email:
sales@prestigemedical.co.uk

Website:
www.prestigemedical.co.uk



Prestige Medical has been a world leader in the field of instrument decontamination for more than 30 years, operating from Blackburn, Lancashire, England. We are part of a diverse, multi-million pound, international engineering group.

Our production facilities and offices are ISO 9001 and ISO 13485 quality accredited and all our products are fully CE marked to the European Medical Device Directive.

Prestige Medical Limited

East House, Duttons Way,
Shadsworth Business Park,
Blackburn BB1 2QR,
England

Registered in England
Reg No. 2826793
Vat No. 633707835

Registered Office:
c/o United Cast Bar (UK) Limited,
Spital Lane, Chesterfield,
Derbyshire, S41 0EX,
England

Prestige Medical is a registered trademark

Due to a continuous process of development, Prestige Medical reserves the right to amend the specification of products and services without notice.

